

Canadian Drilling Innovations, Inc.

A Division Of Apex Metal Industries Inc.



270mm (10.625") CDS613UI

IADC S233 (BA-1155)

PRODUCT DETAILS

7 Blade, Steel Bodied Design

Cutters:	(Face)	49 x 13mm (1/2")
	(Gauge)	6 x 13mm (1/2")
	(Backreamer)	6 x 13mm (1/2")

Nozzles: 9 Interchangeable

TFA Range: 2.85 – 21.56 cm²
(0.442 – 3.341 in²)

Gauge length: 1.75" (44.5mm)

Bit connection: 6-5/8" API REG

Min Makeup Torque: 50 kNm
(37 kft-lb)

Makeup Length: 9.74" (247mm)

Overall length: 14.62" (371mm)

OPERATING PARAMETERS

Flow Rate: 2.1 – 4.6m³/min
(500-1200 gpm)

Max Weight on Bit: 22 kdaN (50 klbs)

RPM: Designed for Rotary and Motor

FEATURES

Backreamers, Increased Nozzle Count



Contact Us:

Toll Free: 855-720-7600

Direct : 403-720-7600

Fax: 888-720-3833

E-mail: info@apexmetal.ca

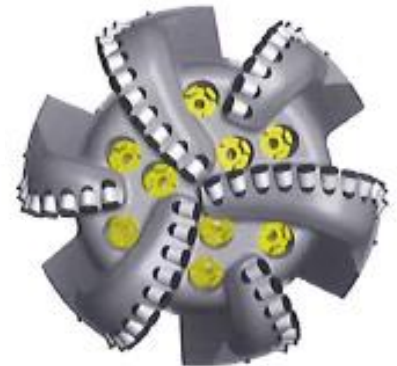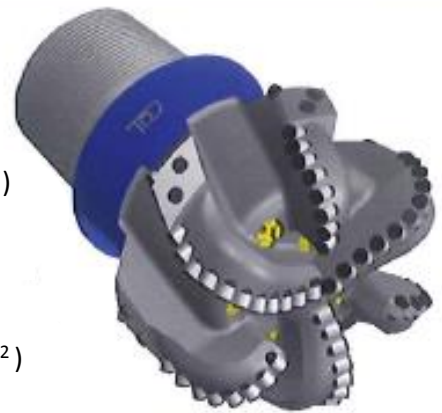

PRODUCT SPECS



Canadian Drilling Innovations, Inc.

A Division Of Apex Metal Industries Inc.



251mm (9.875") CVS716UE

IADC S333 (BA-1153)

PRODUCT DETAILS

7 Blade, Steel Bodied Design

Cutters:	(Face)	43 x 16mm (5/8")
	(Gauge)	6 x 16mm (5/8")
	(Gauge)	1 x 13mm (1/2")
	(Backreamer)	7 x 13mm (1/2")

Nozzles: 7 Interchangeable

TFA Range:	2.219 -15.632 cm ² (0.344 – 2.423 in ²)
------------	---

Gauge length:	9.0" (229mm)
---------------	--------------

Bit connection:	4-1/2" API REG
-----------------	----------------

Min Makeup Torque:	22.4 kNm (16.5 kft-lb)
--------------------	---------------------------

Makeup Length:	17.0" (431mm)
----------------	---------------

Overall length:	21.25" (540mm)
-----------------	----------------

OPERATING PARAMETERS

Flow Rate:	2.1 – 4.6m ³ /min (500-1200 gpm)
------------	--

Max Weight on Bit:	22 kdaN (50 klbs)
--------------------	-------------------

RPM: Designed for Rotary and Motor

FEATURES

Backreamers, Extended Gauge Length

Contact Us:

Toll Free: 855-720-7600

Direct : 403-720-7600

Fax: 888-720-3833

E-mail: info@apexmetal.ca



PRODUCT SPECS

